


Portable Power Station

User Manual

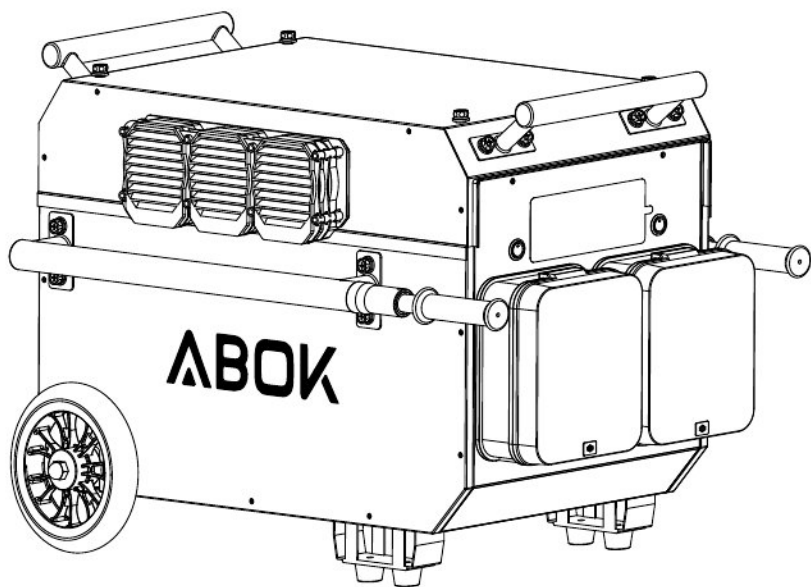

Dear Customer, thank you very much for purchasing and experiencing the 7200 W portable power station. Before operating this product, please carefully read the user manual for proper operation.





In accordance with the transportation regulations of international customs for battery products, the battery level of this product is less than 30 % when it is shipped from the factory. Please fully charge the product after unpacking it to start the 7200 W experience tour.



Precautions For Use

1. Please avoid long-term storage and use of this product in environments with high temperatures and humidity or direct sunlight. This helps prevent shortened battery life and other potential failures of the product. The product should not be close to the fire source, otherwise it may cause a major fire or accident.
2. This product must not be disassembled or modified. Improper operation may cause product malfunction or even fire.
3. Be careful not to drop the product.
4. Please store or use this product out of the reach of children, otherwise the product may be dropped and may cause bodily injury to children.
5. Please use our original accessories, and we will not provide warranty coverage for the defective products caused by the use of non-original accessories.
6. Please plug the product directly into a wall socket to charge it. Do not use extension cords or cable taps, otherwise there is a risk of damage to the extension cords and cable taps or even a fire; If the extension socket is used to charge this product, please do not connect other electrical appliances to this socket, otherwise the household meter may trip.
7. When the product is not in use or idle, please turn it off and unplug the power cable. If it needs to be idle for a long time, please discharge the product from a fully charged state to an uncharged state, then recharge it to about 50 % of the battery level and store it. In order to prolong the life of the product, please take three months as a cycle, operate and keep it in this way.
8. If the product reaches scrap conditions, please discard or recycle the product in accordance with local laws.
9. Please keep the inner and outer carton packaging materials of the product intact to avoid additional packaging costs incurred due to after-sales issues.

AC Output Parameter

Type of AC port	AC output
 US	120V 50Hz/60Hz
  US	240V 50Hz/60Hz
 JP	100V 50Hz/60Hz
  JP	200V 50Hz/60Hz
 CH	220V 50Hz
 UK	220V~240V 50Hz/60Hz
 EU	220V~240V 50Hz/60Hz
 KR	220V 60Hz

Contents

■ Packing List	01
■ Product Introduction	01
■ Button Function Introduction	02
■ Introduction of Display Interface	05
■ Troubleshooting Sheet	06
■ UPS Mode	07
■ Battery Pack Connection Instructions	08
■ Connection of Solar Panels	09
■ Car/Vehicle Charging	10
■ Product Specifications	11
■ Battery Specifications	11
■ Connecting to APP	12
■ Warranty Card	13
■ Disclaimer	14
■ FCC Warning	15

Packing List



Portable Power Station



AC Charging Cable
(100V-120V)



AC Charging Cable
(200V-240V)



Cigarette Lighter Output Port
to XT60 Plug Cable
(Optional Accessories)



MC4 to XT90 Plug
Charging Cable
(Optional Accessories)



User Manual

Product Introduction

This is a 7200 W portable power station with capacity of 9792 Wh, which can be fully charged in 2.5 Hrs with its fast charging function and LiFePO_4 battery of high safety performance;


It can be used as backup power supply device for emergency power outage, natural disaster, camping and vehicles, and can also be used for powering various electrical tools.

7200 W high power, pure sine wave AC output, can be used for household appliances such as dryers, microwave ovens, refrigerators, high-power induction cookers and it can also be used for other electronic devices such as personal computers.

Through the 5000 W ultra-fast charging, this model can be fully; charged within 2.5 hours, The AC input/output voltage frequency can be automatically or manually switched between 50 Hz/60 Hz. This product also supports maximum 2500 W solar charging charge, allow you to charge even when which can allow or in outdoor situations.



Button Function Introduction

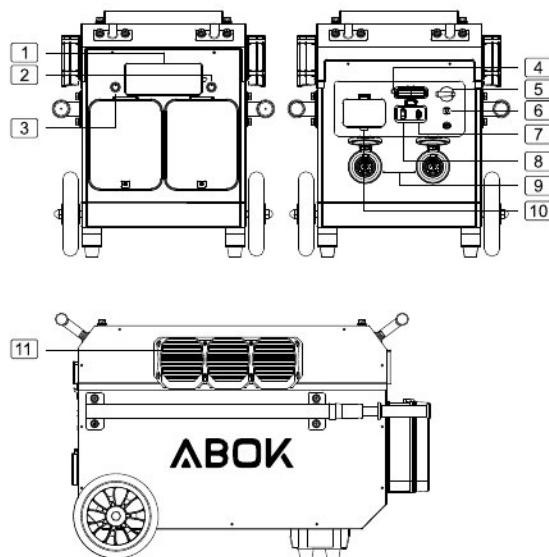

1. LCD Screen
2. Power ON/OFF Button
3. AC Button
(manually switch to 50/60Hz)
4. Earthing Bolt
5. Photovoltaic Switch
6. High Voltage PV Input
7. XT60 Input
8. XT90 Input
9. Parallel Port
10. AC Input
11. Cooling Fans

① LCD Screen

Display the product's battery level and usage status tips.

② Power ON/OFF Button

Instructions: Press and hold the power button for 3 S to turn on/off the whole system.

③ AC Button

Tap the AC button to enable the AC output function. Since there may be differences in the AC output frequency and voltage in different regions, if you need to switch the frequency and voltage, the operations are as follows:

- 1) Press and hold the AC button for 3 seconds to enter the frequency switching mode, the 50 Hz or 60 Hz icon will flash on the display, short press the AC button again to select 50 Hz or 60 Hz; when the icon stops flashing and displays 50 Hz or 60 Hz, it indicates the switch is successful.
- 2) Quickly press the AC button for 10 times to select voltage.

④ Earthing Bolt

Connect the ground wire to prevent the product from causing harm to the human body due to leakage.

⑤ Photovoltaic Switch

When connecting or disconnecting the high voltage photovoltaic, please turn the switch off.

⑥ High Voltage PV Input

High voltage photovoltaic input MC4 interface, maximum power 2500 W, 120 V-450 V supported.

⑦ ⑧ XT60 Input / XT90 Input (Solar Panel Input)

This interface supports solar panel input or car charger input. For details, please refer to "Solar Panel Connection" on page 9 of this manual and "Car/Vehicle Charging" on page 10.

⑨ Parallel Port

The capacity expansion need to be accomplished by connecting the parallel cable into the portable power station. This interface can achieve a maximum input and output of 7200 W.

⑩ AC Input


If you use the household socket to charge this product with its fast charging, the power can reach: USA: 1800 W(120 V), 5000 W(240 V). It only takes 2.5 hours to fully charge our product from 0 % to 100 %, when charging in this way, please pay attention to the following points:

- ※ Please directly plug in the wall socket to charge the product, do not use extension cords or cable taps, otherwise there is a risk of damage to the extension cords and cable taps or will even be a fire disaster.
- ※ If the extension socket is plugged in to charge this product, please do not connect other electrical appliances to this socket, otherwise the household meter may trip.

⑪ Cooling Fans

When the product reaches the temperature threshold set by the system, the cooling fan will automatically run, accompanied by a certain fan noise (fan noise below 60 dB is normal). Do not block the cooling suction/exhaust port during use of this product, and do not place any object within the range of 30 CM.

Introduction of Display Interface

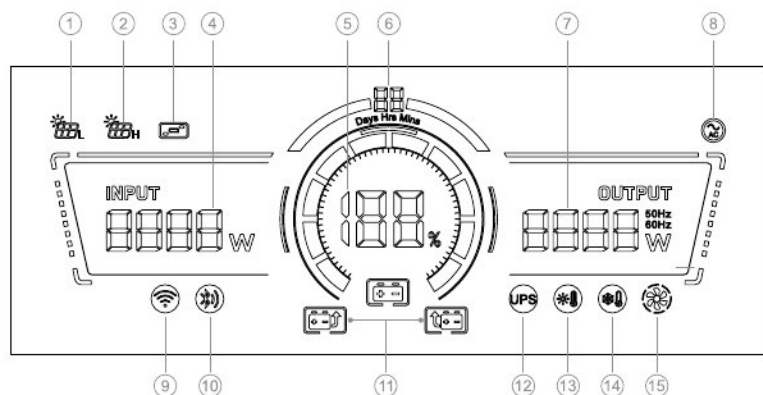

- | | |
|---------------------------|------------------------|
| 01. High Voltage PV Input | 09. WiFi |
| 02. Low Voltage PV Input | 10. Bluetooth |
| 03. AC Input | 11. Extra Battery Pack |
| 04. Total Input Power | 12. UPS |
| 05. Power Percentage | 13. High Temperature |
| 06. Charge/Discharge Time | 14. Low Temperature |
| 07. Total Output Power | 15. Fan Status |
| 08. AC Output | |

Screen Display Description

Power display: When the product is in the charging state, the battery progress bar rotates continuously in the form of a clockwise marquee, and the battery level percentage gradually increases; when the product battery level is 0, the battery level percentage icon flashes.

Input and output status: When the product is working, the total input power, total output power and the cursor corresponding to the working area will be displayed on the screen.

Alarm prompt: See the following troubleshooting table for details.

Troubleshooting Sheet

Phenomenon	Cause	Processing method
 The above output icon flashes and beeps.	The output exceeds the standard and it's short-circuited.	1.Disconnect the device and restart the product. 2.Replace different electrical equipment to test the machine.
  The temperature warning icon flashes and beeps.	The temperature of the product is too high or too low.	Remove the device and turn the power OFF Wait for the device to reach the appropriate temperature.
 The icon of connecting to the AC mains flashes and the product cannot be charged.	The charging cable is poorly connected.	Check the connection status of the cable and the power supply of the power supply.
  The parallel light blinks.	Parallel failure.	Charge the product with lower battery capacity, or discharge the product with higher battery capacity (until the power difference of these two products is less than 80%), and then reconnect them.

UPS Mode


• UPS Feature

This product has the function of backup uninterruptible power supply. The usage and operation precautions are as follows:


As shown in Pic 1 below, when the product is connected between the wall socket and the electrical appliance, and the power supply and AC switch of the product are in the ON state, the product enters the UPS working mode. The AC mains in the socket supplies power to the electrical appliance through the bypass circuit, and also charges the product.

In this working state:


For US specifications: Under low voltage (120 V), the rated power of appliances must be below 1800 W in this mode. Under high voltage (240 V), the rated power must be below 7200 W.

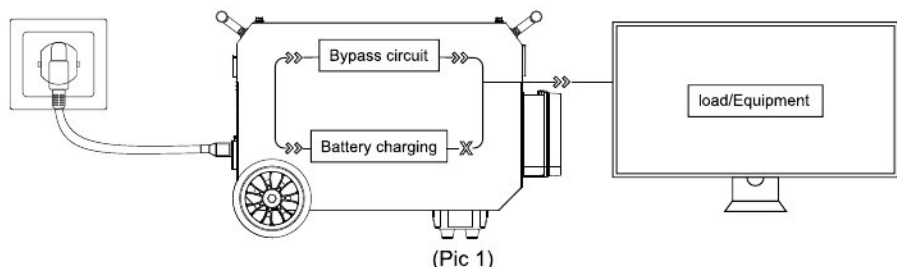

As shown in Pic 2 below, when the AC mains at the socket end is disconnected, the bypass output inside the product stops working, the product switches to a bidirectional inverter circuit within 10ms, and the circuit outputs supply power to the electrical appliance to ensure that the electrical appliance is uninterrupted and works normally during the process.

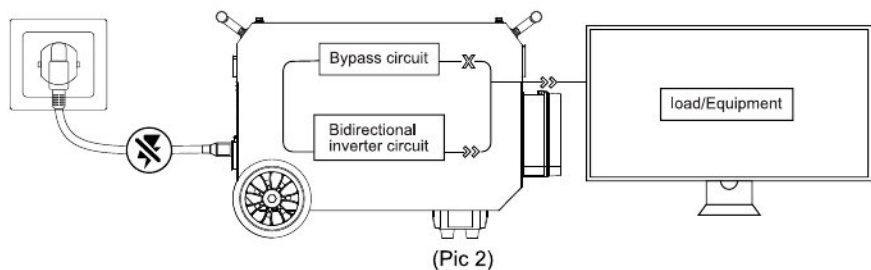

Battery Pack Connection Instructions

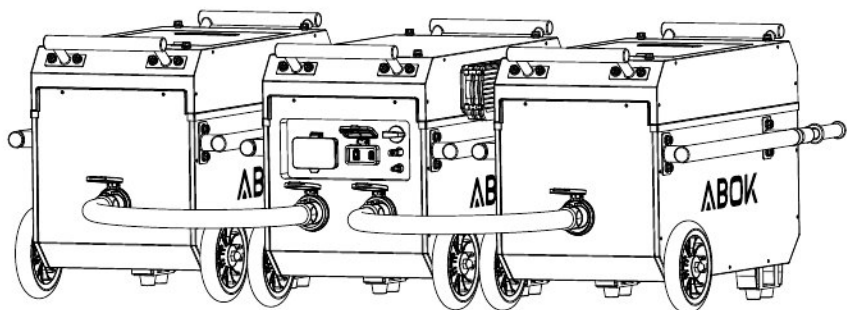

The portable power station can be connected to up to two battery packs through parallel cables, with a maximum capacity of up to 29376 Wh. Please connect the product when the portable power station and extra battery pack are turned off. After the connection is completed, there will be icons of extra battery pack connection displays on the screen. After connecting them successfully, the system can start charging or discharging. When charging and discharging after connection, the power will be distributed according to the left power of the product.

The charging power of the device with lower capacity is small when charging, and the output power of the device with higher capacity is high when discharging. If there is no external charging, energy exchange may occur between the portable power station and battery packs. When the left capacity of them is close, the charging process will stop, and the power will be show on the screen.

Precautions

- Please do not plug and unplug the connecting cable when the products is under use, please connect or disconnect these two products when they are turned off.
- Please do not make the connecting ports of the portable power station short-circuited.

Connection of Solar Panels

Under the condition of light, this product can be connected to the solar panel and getting charged. The charging power is determined according to the conditions of light and weather.

In solar charging mode, two PV input schemes are available: Low-Voltage PV input and High-Voltage PV input.

Solar panels can be connected either in series or in parallel.


If a series connection is used, the total input voltage of the solar panel string must fall within 11.5–55 V for Low-Voltage PV input, or 120–450 V for High-Voltage PV input.

If a parallel connection is used, the total operating current of the solar panels cannot exceed 30 A for Low-Voltage PV input, or 20 A for High-Voltage PV input.

• Solar panel charging

Scheme One


Low-Voltage PV input (XT 90)

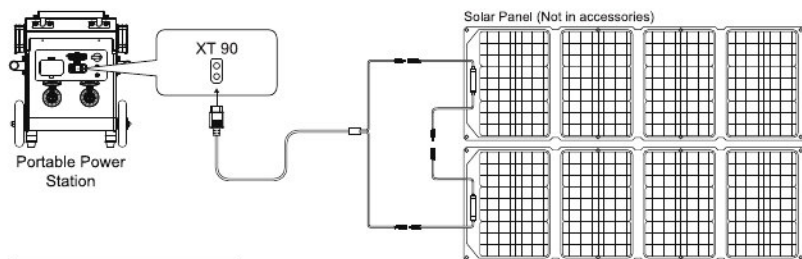

The diagram shows a series connection as an example.

Scheme Two

High-Voltage PV input (MC4)

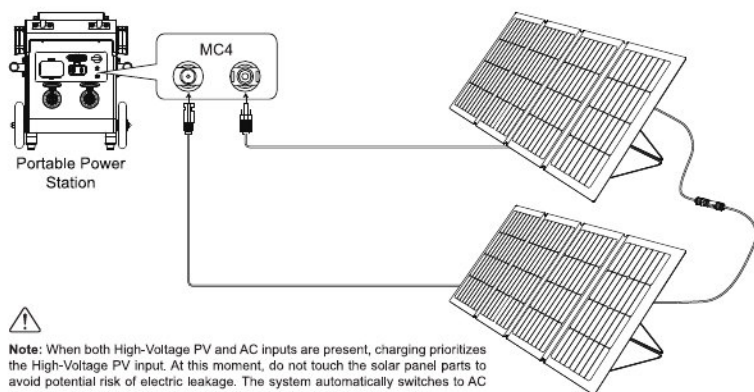

Note: When both High-Voltage PV and AC inputs are present, charging prioritizes the High-Voltage PV input. At this moment, do not touch the solar panel parts to avoid potential risk of electric leakage. The system automatically switches to AC input once the High-Voltage PV input voltage falls below the threshold.


Car/Vehicle Charging

When the car is in the process of starting, connect the car charging port on the car and the product through the car charging cable to charge the product. The connection method is shown in the picture below:

This product supports 12 V/24 V car charger charging, please pay attention to the following two points when using this method to charge:

- ※ Please do it when the car started, otherwise the car battery may be exhausted.
- ※ Vehicle charging power is usually in the range of 90 W-120 W, and the charging time is long.

If fast charging is required, the AC mains charging is recommended.

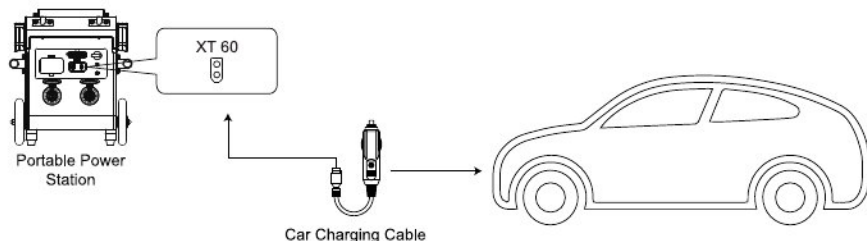

Product Specifications

Product Name	Portable Power Station
Dimension	L × W × H = 880 × 623 × 605 mm
Weight	131.8 kg
Capacity	9792 Wh
AC Input	1800 W(120 V); 5000 W(240 V)
AC Output	3600 W(120 V); 7200 W(240 V)
Solar Charging	120-450 Vdc 2500 W MAX 12-55 Vdc 1200 W MAX
Car Charging	12-30 Vdc 10 A
Shutdown Current	<500 μ A
Working Temperature	-10 °C-40 °C
Environment Humidity	≤90% RH
Cycle Times	>6000 times

Battery Specifications

Cell type	LF100LA
Rated voltage of single battery	3.2 V
Rated capacity of single battery	102 Ah
Rated voltage of battery pack	48 V
Output voltage range of the battery pack	40 V-54 V
Rated capacity of battery pack	9792 Wh

Connecting to APP

Step 01




BrightEMS

Step 02



Add Device

Step 03



Search By Bluetooth

Connecting To Wi-Fi



Connect The Network

Warranty Card

Warranty Card	
Name	
Address	
Model	
Serial Number	
Shopping Platform	
Tel	
E-mail	
Brand, Order Number	
Purchase Date	
Filling Date	
What Is The Product Failure	
Please Fill In All The Above Items.	

This product comes with a 2-year warranty upon purchase, and an additional 3-year warranty is also available.

- If there is a quality problem within the range of normal use, we provide warranty service.
- After purchasing our company's products, please keep this product together with invoices and other items. When maintenance services are needed, please provide information according to our company's request.
- In the case where the warranty is damaged or altered, and there is no stamp of the sales store on the warranty, the warranty service may not be provided.
- Damage caused by use beyond the normal range of use is not covered by the warranty service.
- The content of the warranty scope shall be subject to the content recognized by the company.
- Even within the scope of the warranty, defective products will sometimes be exchanged for products with the same function. The shipping and repair fees for products outside the warranty range shall be paid by the customer.
- Sometimes the specifications and functions of the product will be updated without prior notice.

Disclaimer

Before use, please read the user manual of this product to ensure full understanding and correct use. After reading, keep the user manual properly for future reference. If you do not operate this product correctly, you could cause serious injury to yourself or others, or result in damage to the product and property. Once you use this product, you are deemed to have understood, recognized and accepted all terms and content of this document. Users undertake to be responsible for their own actions and all consequences arising therefrom. We are not responsible for all losses caused by the user's failure to use the product in accordance with the User Manual.

In compliance with the law, the company has the final right to interpret this document and all related documents of the product. If it is updated, revised or terminated without prior notice, please visit our official website for the latest product information.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.